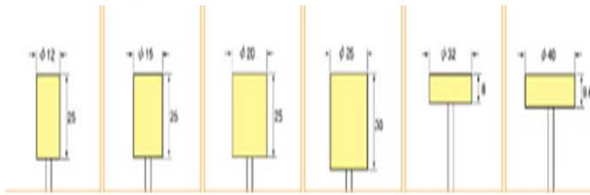














Ø6 Diameter




Features:

Compressed by the high intensive wool. This, Together with the use of diamond paste or lapping compound, enables to keep the shape of materials and shining of steel without line marks.



Form						
Order No.	AL-120A	AL-150A	AL-200A	AL-250A	AL-320E	AL-400E
Form						
Order No.	AL-150C	AL-200C	AL-250C	AL-150K	AL-200K	AL-250K

Shape	Order No.	(Diaφ×Thick×Holeφ)m/m
	FB0751295	75×12×9.5
	FB1501012	150×10×12
	FB2051016	205×10×16
	FB2551025	255×10×25
	FB2551525	255×15×25